

SPECIAL PRODUCT GROUP

Our high-performance special products provide an aesthetic appearance, long-lasting protection and superior durability for your surfaces.



SUPERIOR GLOSS
Provides excellent gloss and a perfect finish on surfaces.



EASY CLEANING
Reduces the adhesion of dirt, oil and stains.



LONG-LASTING PROTECTION
Protects surfaces against harsh external conditions and ensures durability.



WIDE USAGE AREA
Suitable for reliable use on many different surfaces.

GLASS PAINT		PACKAGING	NET WEIGHT
	Provides easy cleaning of dirt, fingerprints and water stains on glass surfaces. Offers excellent gloss, enhancing the appearance of surfaces.		15 KG
	✓ Provides a smooth and outstanding surface on glass		2,5 KG
	✓ Gives a shiny and stain-resistant finish		0,850 KG
	✓ Reduces dust and dirt adhesion		
✓ Easy application and fast drying			
✓ Provides a clean and bright look for a long time			

YACHT VARNISH		PACKAGING	NET WEIGHT
	Provides superior protection against harsh marine conditions. Offers high durability and a perfect gloss. Enhances the natural beauty of wood surfaces.		15 KG
	✓ Clear, high gloss and smooth finish		2,5 KG
	✓ Provides superior resistance to salt water and UV rays		0,850 KG
	✓ Protects against yellowing		
✓ Resistant to harsh marine conditions			
✓ Maintains the natural texture of wood for a long time			

WOOD VARNISH		PACKAGING	NET WEIGHT
	Provides effective protection against external factors on wood surfaces. Offers a decorative and protective finish, enhancing the natural beauty of wood.		15 KG
	✓ Protects and decorates wood surfaces		2,5 KG
	✓ Offers extra durability to the varnish structure		0,850 KG
	✓ Resistant to water, moisture and UV rays		
✓ Maintains a natural and aesthetic appearance			
✓ Can be safely used on interior and exterior wood surfaces			



TECHNICAL SPECIFICATIONS

Appearance	Clear, Glossy
Type	Solvent-based
Density	0,90 - 1,05 g/cm³
Solid Content	% 20 - 35
Application Method	Brush, roller, spray
Drying Time (20°C)	Surface dry: 15 - 30 min Full hardening: 24 hours
Shelf Life	2 years



APPLICATION AREAS

	Glass surfaces, mirrors, windows
	Yachts, boats and marine structures
	Wooden furniture, panels
	Garden furniture, pergolas, decks
	Interior and exterior wooden surfaces



APPLICATION INSTRUCTIONS

Surfaces to be painted must be clean, dry and free from dust. Stir the product well before use. After application, protect from water, moisture and dust until fully dry. It is recommended to apply 2-4 coats depending on the surface. Ideal application temperature is between 10°C - 30°C.



VOREXA LumiCoat™

PHOTOLUMINESCENT EPOXY WALL COATING

★★★★★
PROFESSIONAL
GLOW
TECHNOLOGY

GLOW-IN-THE-DARK | TWO-COMPONENT EPOXY SYSTEM

Advanced epoxy technology with photoluminescent pigments.
Charges with natural or artificial light and glows brilliantly in the dark.
Ideal for decorative and safety applications.



PHOTOLUMINESCENT TECHNOLOGY

Charges with natural or artificial light.



LONG-LASTING GLOW

Glow for hours after the light is gone.



CHEMICAL RESISTANCE

Resistant to chemicals, solvents and moisture.



ABRASION RESISTANCE

High durability, scratch and abrasion resistant.



EASY APPLICATION

Roller, brush or spray application.




INDOOR USE

Ideal for decorative indoor surfaces.




GLOWS
BRIGHTLY
IN THE
DARK!

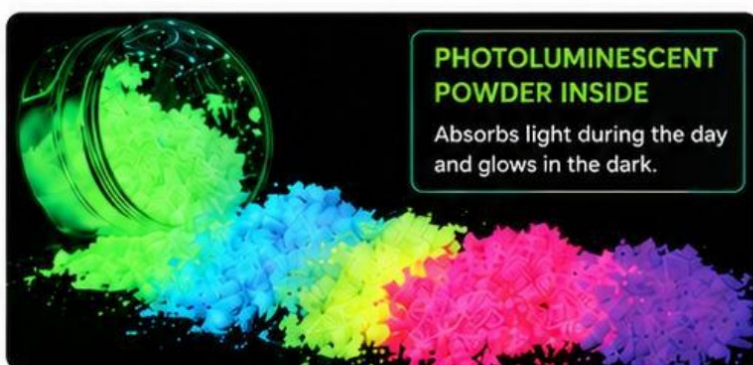

PHOTOLUMINESCENT POWDER INSIDE

Absorbs light during the day and glows in the dark.

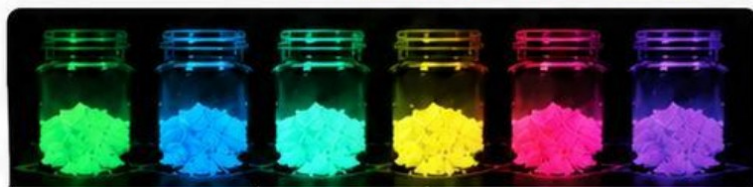

- ✓ High performance epoxy based formula
- ✓ Photoluminescent pigments provide bright glow in the dark
- ✓ Suitable for interior wall applications
- ✓ Ideal for children's rooms, hotels, entertainment centers, emergency exits and decorative areas
- ✓ Risk of tripping at empty applications
- ✓ Solvent free, odorless, environment friendly

APPLICATION AREAS



PHOTOLUMINESCENT POWDER COLOR OPTIONS



TECHNICAL SPECIFICATIONS

Binder Type	: Epoxy Resin
Mixing Ratio	: 4:1 (Base : Hardener by weight)
Solid Content	: 100% ± 20%
Pot Life (20°C)	: 4 - 6 hours
Dry to Touch	: 6 - 8 hours
Full Cure	: 7 days
Coverage	: 10 - 12 m² / L (Two coats)
Packaging	: 16 kg (Base) + 4 kg (Hardener)



APPLICATION INSTRUCTIONS

- Surface must be clean, dry and solid.
- Mix base and hardener at the specified ratio.
- Add photoluminescent powder and mix thoroughly.
- Apply 2-3 coats for best glow performance.
- Ensure temperature is above +5°C.
- Keep in a lighted area before darkness.



STORAGE CONDITIONS

- Store in a cool and dry place, away from direct sunlight.
- Keep the lid tightly closed.
- Keep out of reach of children.
- Shelf life: 12 months from production date.



Stronger Surfaces
Safer Lives



SPECIAL PRODUCTS

HIGH QUALITY – SUPERIOR PROTECTION – LONG LASTING SOLUTIONS



QUALITY
MANAGEMENT

ENVIRONMENTAL
MANAGEMENT

OCCUPATIONAL
HEALTH & SAFETY



WATER
BASED



SUPERIOR
PROTECTION



UV
RESISTANT



ELASTIC
STRUCTURE



EASY
APPLICATION



ENVIRONMENTALLY
FRIENDLY



BORDER PAINT

Water-based road marking paint for outdoor and indoor use. Fast drying.

TECHNICAL SPECIFICATIONS

Binder Type	Acrylic emulsion
Color	White, Yellow, Red
Density	1.40 ± 0.10 g/cm ³
Solid Content	%60 ± 2
Drying Time	Surface dry: 20–30 min Full cure: 24 hours
Application Temp.	+5°C / +35°C
Coverage	8–10 m ² /kg (one coat)
Packaging	20 kg
Shelf Life	12 months

ADVANTAGES

- High visibility
- Abrasion and weather resistant
- Fast drying
- Easy application
- Suitable for outdoor and indoor use

AREAS OF USE



- Roads and streets
- Parking areas
- Factories and warehouses
- Indoor and outdoor areas



POOL PAINT (EPOXY)

Two-component epoxy paint for swimming pools.

TECHNICAL SPECIFICATIONS

Binder Type	Epoxy resin
Color	Light blue, White, etc.
Mixing Ratio (A:B)	4 : 1 (by weight)
Density	1.50 ± 0.10 g/cm ³
Solid Content	%70 ± 2
Application Temp.	+10°C / +30°C
Coverage	6–8 m ² /kg (two coats)
Packaging	20 kg (A+B)
Shelf Life	12 months

ADVANTAGES

- High water and chemical resistance
- Smooth surface finish
- Easy to clean
- Suitable for continuous water contact
- Long-lasting protection

AREAS OF USE



- Swimming pools
- Water tanks
- Decorative water features
- Spa and thermal pools



BATHTUB PAINT

Two-component ceramic paint for tubs and tiles.

TECHNICAL SPECIFICATIONS

Binder Type	Epoxy resin
Color	White
Density	1.45 ± 0.10 g/cm ³
Solid Content	%65 ± 2
Application Temp.	+10°C / +30°C
Coverage	8–10 m ² /kg (two coats)
Packaging	5 kg (A+B)
Shelf Life	12 months

ADVANTAGES

- Excellent adhesion
- Water and chemical resistant
- Smooth and glossy finish
- Easy to clean
- Ideal for renovation
- Long-lasting durability

AREAS OF USE



- Bathtubs
- Shower trays
- Ceramic tiles
- Bathrooms
- Kitchens



CERAMIC PAINT

Two-component ceramic paint for tiles and ceramic surfaces.

TECHNICAL SPECIFICATIONS

Binder Type	Epoxy resin
Color	White, Grey, Beige, etc.
Density	1.40 ± 0.10 g/cm ³
Solid Content	%65 ± 2
Application Temp.	+10°C / +30°C
Coverage	8–10 m ² /kg (two coats)
Packaging	5 kg (A+B)
Shelf Life	12 months

ADVANTAGES

- High coverage
- Scratch and chemical resistant
- Smooth and glossy finish
- Easy application
- Suitable for indoor and outdoor use
- Long-lasting protection

AREAS OF USE



- Tiles and ceramic surfaces
- Bathrooms and kitchens
- Residential and commercial spaces
- Old surface renovation



WATER
BASED



SUPERIOR
PROTECTION



UV
RESISTANT



ELASTIC
STRUCTURE



EASY
APPLICATION



ENVIRONMENTALLY
FRIENDLY



QUALITY
MANAGEMENT



ENVIRONMENTAL
MANAGEMENT



OCCUPATIONAL
HEALTH & SAFETY





HIGH
PERFORMANCE



MAXIMUM
PROTECTION



ROAD MARKING PAINT (CHLORINATED RUBBER MODIFIED)



Chlorinated rubber modified formula provides excellent adhesion on asphalt and concrete surfaces. It is resistant to abrasion, weather conditions, UV rays and heavy traffic. Offers long-lasting and high visibility.

- ✓ Excellent adhesion to asphalt and concrete
- ✓ High abrasion and impact resistance
- ✓ UV resistance and weather durability
- ✓ Fast drying
- ✓ Vibrant and long-lasting colors

APPLICATION AREAS



ROAD
MARKINGS



PARKING
LINES



FACTORY
AREAS



STORAGE AND
LOGISTICS AREAS




AIRPORT
RUNWAYS




PACKAGING INFORMATION

PACKAGE	BOX QUANTITY
20 kg	1
2.5 kg	4

COLOR OPTIONS



YELLOW



WHITE

ALUMINUM STAR PAINT



Thanks to its special aluminum pigments, it provides high resistance to weather conditions and metallic surfaces. It offers superior protection against corrosion, scratches and external factors. Used for decorative and protective purposes on metal surfaces.

- ✓ High gloss metallic appearance
- ✓ Corrosion and rust resistance
- ✓ Heat and weather resistance
- ✓ Suitable for indoor and outdoor use
- ✓ Easy application and fast drying

APPLICATION AREAS



STEEL
CONSTRUCTIONS



METAL DOORS AND
WINDOW FRAMES



TANKS, PIPES AND
HEATING SYSTEMS



FENCES AND
METAL PARTS



DECORATIVE
METAL SURFACES



PACKAGING INFORMATION

PACKAGE	BOX QUANTITY
12 Litres	1
2.2 Litres	4
0.700 Litres	6

1K ACRYLIC FLOOR PAINT



Single-component acrylic resin based floor paint. Provides durable and aesthetic floor surfaces. Excellent adhesion to concrete, high abrasion resistance, and long-lasting protection against chemicals and mechanical loads. Creates a decorative and professional appearance.

- ✓ High gloss metallic appearance
- ✓ Corrosion and rust resistance
- ✓ Heat and weather resistance
- ✓ Suitable for indoor and outdoor use
- ✓ Easy application and fast drying

APPLICATION AREAS



FACTORIES AND
PRODUCTION AREAS



PARKING LOTS
AND GARAGES



SHOPPING MALLS
AND RETAIL FLOORS



SCHOOLS, HOSPITALS
AND PUBLIC BUILDINGS



DECORATIVE
FLOOR SURFACES



PACKAGING INFORMATION

PACKAGE	BOX QUANTITY
15 kg	1

TECHNICAL SPECIFICATIONS

BINDER TYPE

Chlorinated Rubber
Modified / Acrylic Resin

APPLICATION METHOD

Brush, Roller,
Airless Spray

THINNER

Synthetic Thinner

APPLICATION SURFACE

Concrete

DRYING TIME

Touch Dry: 20°C
Full Cure: 15-30 minutes

CONSUMPTION

6-8 m²/kg
(single coat)

NUMBER OF COATS

2 coats

Note: The surface must be clean, dry and free from oil.
For better protection, it is recommended to use a primer.