



HIGH
PERFORMANCE



MAXIMUM
PROTECTION



POLYURETHANE FLOORING SYSTEMS



SEAMLESS. STRONG. BUILT TO LAST.

High-performance polyurethane flooring systems designed for industrial areas, offering excellent mechanical strength, chemical resistance and an aesthetic appearance.

SEAMLESS. SAFE. LONG-LASTING.

Our high-performance polyurethane flooring systems provide high mechanical strength, chemical resistance and an aesthetic appearance in industrial areas.



HIGH
DURABILITY



CHEMICAL
RESISTANCE



ABRASION
RESISTANCE



SEAMLESS
SURFACE



EASY
APPLICATION



INDUSTRIAL
FACILITIES



FOOD & BEVERAGE
FACILITIES



PARKING AREAS



HOSPITALS &
CLEAN ROOMS

2026

PRODUCT CATALOG

FLOORING SOLUTIONS
FOR A STRONGER TOMORROW



ADVANCED
FLOORING
TECHNOLOGY



LONG-LASTING
PROTECTION



LOW VOC
FORMULATION



POLYURETHANE SELF LEVELING FLOOR COATING

A high chemical resistance, abrasion resistant, self-leveling floor coating. It provides a seamless and smooth surface. Resistant to impact, abrasion and chemical effects.

- ✓ Seamless and smooth surface
- ✓ High abrasion resistance
- ✓ Resistant to impact and chemical effects
- ✓ Hygienic, dust-free and easy to clean
- ✓ Ideal for indoor industrial areas

APPLICATION AREAS

- 

OPEN PARKING FLOORS
- 

CLOSED PARKING FLOORS
- 

WAREHOUSES & STORAGE AREAS
- 

FOOD & BEVERAGE FACILITIES
- 

LIGHT - HEAVY INDUSTRIAL FLOORS



POLYURETHANE SILK MATT VARNISH 55 GLOSS – SCRATCH RESISTANT

Creates a decorative and protective layer on surfaces with a silk matte appearance. Provides high scratch resistance, UV resistance and chemical durability, and maintains its appearance for a long time.

- ✓ Long-lasting durability (5-8 years)
- ✓ High scratch resistance
- ✓ UV and chemical resistance
- ✓ Easy application, excellent leveling
- ✓ Ideal for indoor and outdoor surfaces

APPLICATION AREAS

- 

TERRACES AND BALCONIES
- 

FLAT ROOFS COATINGS
- 

OPEN PARKING AREAS
- 

POOLS AND WATER TANKS
- 

WALKWAYS AND BRIDGES



POLYURETHANE MATTE VARNISH 15 GLOSS – SCRATCH RESISTANT

Provides a natural matte appearance and a durable surface. Offers high scratch resistance and chemical durability, maintaining its appearance for a long time.

- ✓ Matte appearance (15 Gloss)
- ✓ High scratch resistance
- ✓ Chemical and weather resistance
- ✓ Easy to clean
- ✓ Ideal for indoor and outdoor applications

APPLICATION AREAS

- 

EXTERIOR WALL COATINGS
- 

TERRACES & BALCONIES
- 

OPEN PARKING AREAS
- 

EXPOSED SURFACES AGAINST SUNLIGHT
- 

WALKWAYS AND BRIDGES



POLYURETHANE GLOSS VARNISH

Provides high gloss and brightness. Offers superior protection against scratches, impacts and chemicals.

- ✓ High gloss
- ✓ Excellent scratch resistance
- ✓ Chemical and UV resistance
- ✓ Easy to clean
- ✓ Maximum protection for indoor and outdoor applications

APPLICATION AREAS

- 


OPEN PARKING FLOORS
- 

TERRACES & BALCONIES
- 

FLAT ROOF COATINGS
- 

EXPOSED SURFACES AGAINST SUNLIGHT
- 

STORAGE & LOADING AREAS

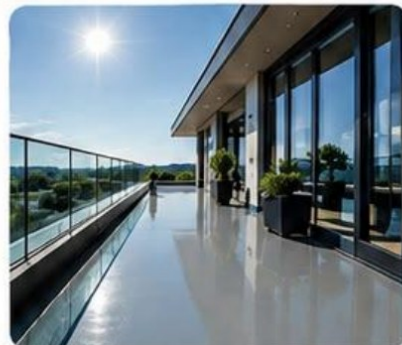

TECHNICAL SPECIFICATIONS

**MIXING RATIO**
(by weight)
As specified
for the components

APPLICATION METHOD
 Roller, brush
or spray

AMBIENT TEMPERATURE
 5 – 35 °C

DRYING TIME (20°C)
 Touch dry: 4-6 hours
Full cure: 24 hours

APPLICATION TEMPERATURE
 +10 °C / +30 °C

NUMBER OF COATS
 2 coats

APPLICATION AREA
 Indoor and
Outdoor